

Falò Visible flame view for outdoor use

Producing warmth.

MAIN FEATURES

TECHNICAL

Decorating visible flame creates a glamour atmosphere.
Radiant heating flow along the glass tube.
Smart functioning.
Automatic and manual models.
Structure: parts in inox steel and aluminium.
Anti tipping device, windproof and ionization control flame.

END USER

Anti scratch feet.
Wheels set (optional).
Belt for fastening any LPG cylinder.
Running by LPG and Natural Gas.
Designed product.

01_ Visible flame inside a glass tube




02_ Radio remote control, wheels set



03_ Remote-controlled model



RANGE, SIZE AND WEIGHT

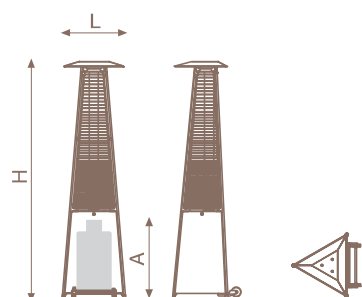

Model	manual	remote-controlled	u.m.
Hat (L)	648	648	mm
Base (L)	640	640	mm
Height (H)	2380	2380	mm
Height cylinder (A)	705	665	mm
Net weight	29	30	Kg
Packaging: L x L x h	650x570x2400	650x570x2400	mm
Gross weight	41,5	42	Kg




Equipped standard

- Anti-tipping device
- Rubber feet
- Manual model, various power levels
- Remote control model, 3 power levels

NOTE: FOR APPLIANCE OPERATING WITH NATURAL GAS, YOU MUST CHANGE THE 7TH FIGURE ON CODE, PUTTING A "M" (EX. FL12M0 M0100).

NOTA: THE UNIT COMES FULLY ASSEMBLED AND READY TO USE.

RANGE

	Model	Code	Description
	12m	FL12M0 L0100	Manual ign., structure cataphoresis + painted trasp.
	12t	FL12A0 L0100	Rem. control, structure cataphoresis + painted trasp.
	12m	FL12M0 L0000	Manual ignition, stainless structure.
	12t	FL12A0 L0000	Remote control, stainless structure.

INSTALLATION TYPOLOGIES

